


ES70 Lift & Slide Window System



A high-end thermo-insulating system, suitable for door height windows with exceptional requirements for functionality and aesthetics.

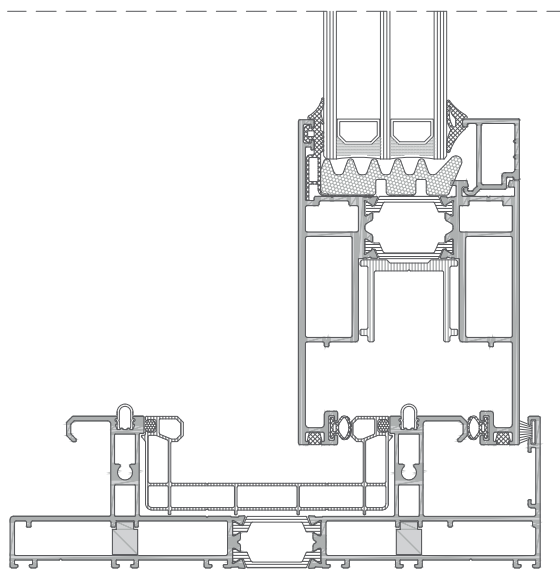

Technical features

- Elegant straight design
- Flat bottom frame option with only 25 mm height
- Narrow interlock option
- Double & triple glazing option
- Glazing infill range: 25 ÷ 52 mm

Hardware accessories

- Lift & Slide mechanism
- On demand: Max. sash width / height up to 3300 mm / 3300 mm
- Max. sash weight: 300 kg
- On demand: up to 440 kg

Surface treatment options

- RAL colours
- ETEM colours
- Anodizing
- Wood effects
- Quality Standards:
 - QUALICOAT
 - QUALANOD
 - QUALIDECO

Production certificates

- EN ISO 9001
- EN ISO 14001
- OHSAS 18001

Performance

Air Permeability:	Class 4
Watertightness:	E750
Resistance to Wind Load:	C5
Thermal transmittance (U_p):	from 2,73 W/(m²K)

Typologies

- Single, double, triple & multiple track Lift & Slide
- Combination with fixed light (Hotel type)
- Flat rails solution with only 25mm height
- Integration of fly screens



